University of hawaii, Instrumentation development Laboratory

STURM2 SYSTEM ENCLOSURE

POWER / SIGNAL CONNECTIONS


- o 1 x USB-A
- o 2 x Optical
- 6 x SMA
- AC in, 110 -230 V 10 A
- On / Off switch with circuit breaker




BOARD PLACEMENT



BOTTOM PLATE

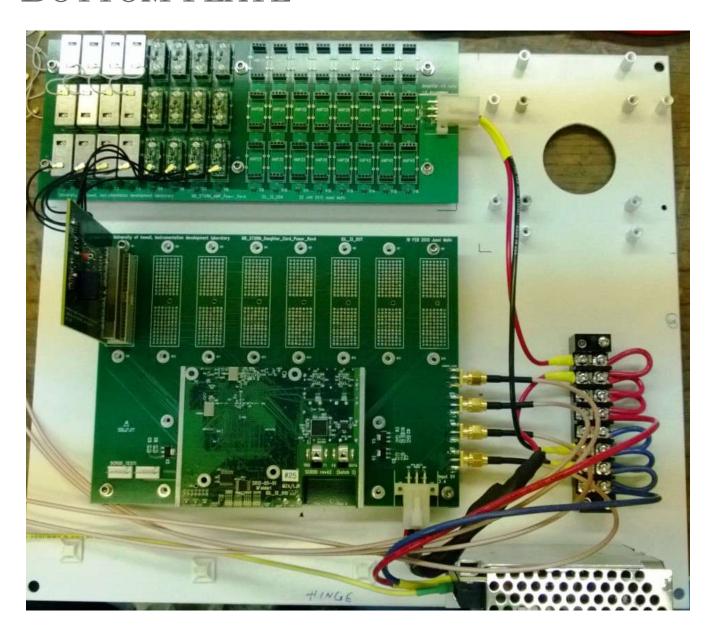


AMPLIFIER POWER BOARD WITH AMPS

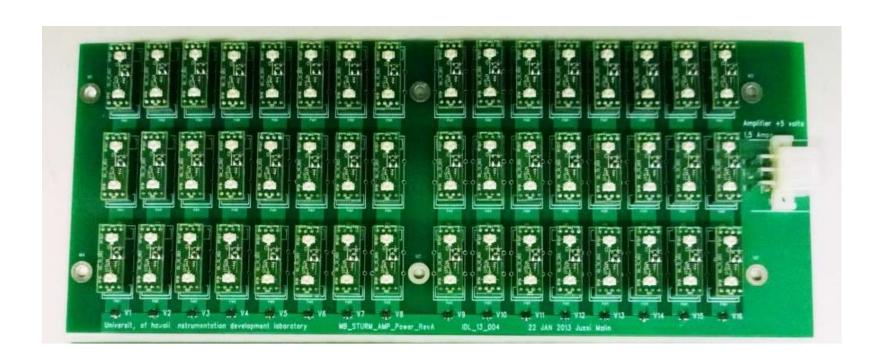

RF SHIELDS

• Top cover can be rotated to make the cables point the right way

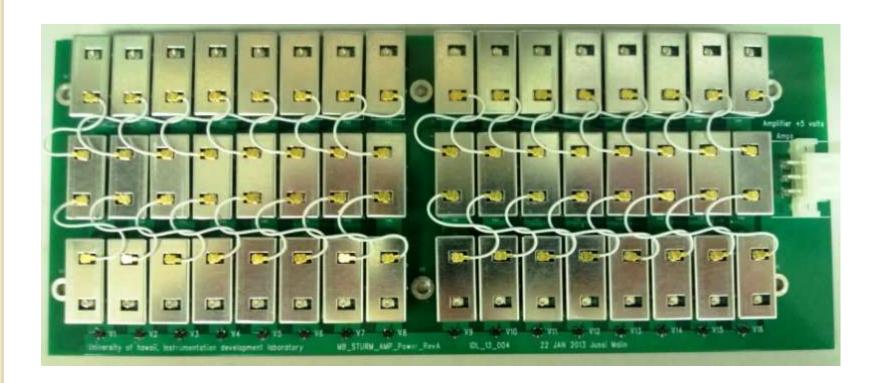

SENSOR BOARD WITH CABLES



SENSOR BOARD WITH CABLES

